


NOTES


- 1. SRT Terminal shown. For Terminal type and details, see Contract and applicable Standard Plan(s).
- 2. The slope from the edge of the shoulder into the face of the guardrail should not be steeper than 1:10 .
- 3. See Standard Plan for Box Culvert Guardrail Steel Post.
- 4. For spans up to 5715 mm, see Standard Plan for Guardrail Placement Cases 19, 20, and 21.

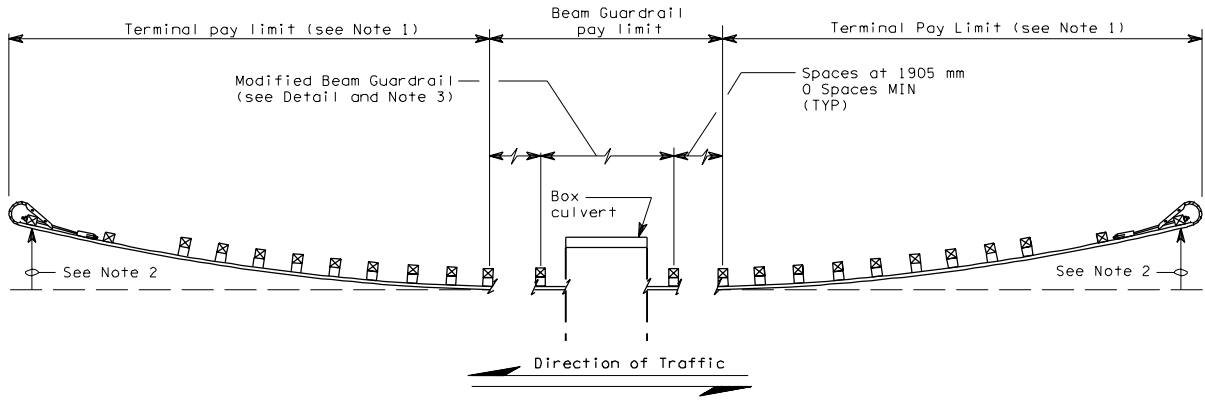

CASE 15

ALL DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE NOTED

GUARDRAIL PLACEMENT

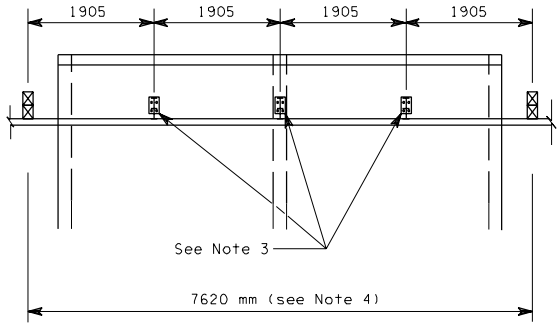

DETAIL

STANDARD PLAN C-2i

APPROVED FOR PUBLICATION

STATE DESIGN ENGINEER	DATE
WASHINGTON STATE DEPARTMENT OF TRANSPORTATION OLYMPIA, WASHINGTON	